

KEY INDUSTRIES

- Oil & Gas and Petrochem
- PowerGen, Hydro PowerGen and Waste Management
- Food & Packaging
- Process Industry
- Mining & Drilling
- Pulp & Paper
- Plastics

HARDFACING & COATING

- HVOF
- APS or PNTA
- Welded Coatings (PTA, TIG, MIG, etc.)

MACHINING CAPABILITIES:

- Turning
- Milling
- Drilling
- Grinding
- Lapping
- EDM



QUALITY & LABORATORY

- Dye Penetrant Test
- Hardness Test
- Bend Test
- Micrograph & Porosity Inspection
- Outsourcing specific analysis to external laboratories



CERTIFICATION

- ISO 9001-2008
- Some alloys are suitable for food contact according to REG. (CE.) 1935:2004

**For more information or inquiries,
please contact:**

Deloro Coatings S.r.l.

Via Ornago 26 | 20882 Bellusco (MB) | Italy

Tel.: +39 039 620 44 11 | Fax: +39 039 602 26 01

Email: info.coatings@deloro.com

Your source for reliable Wear Solutions that ensure productivity

Deloro Group is dedicated to providing superior and reliable solutions for Wear and Corrosion Protection. When you partner with Deloro, you can expect cost-optimized solutions that will enhance and extend the life of your machinery/parts.

Deloro
Wear Solutions

Offering Bespoke
Components, Coating
Services, Consumables
and Equipment

Deloro
Coatings


Offering high-quality
coating services utilizing
a wide range of cobalt,
nickel, and iron-based
alloys as well as
tungsten carbide

Deloro
HTM


Offering HIP
Process for
densification,
near net shape
and bi-metallic
components

Deloro
Microfusione

Leading manufacturing
services provider for
highly-demanding air- and
vacuum-cast super alloy
investment castings

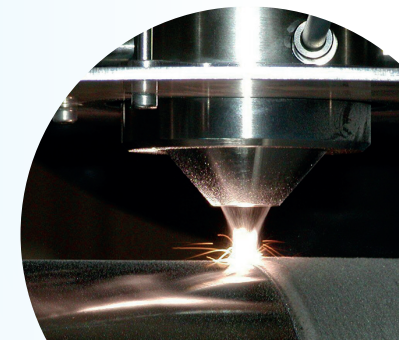

HARDFACING & COATINGS

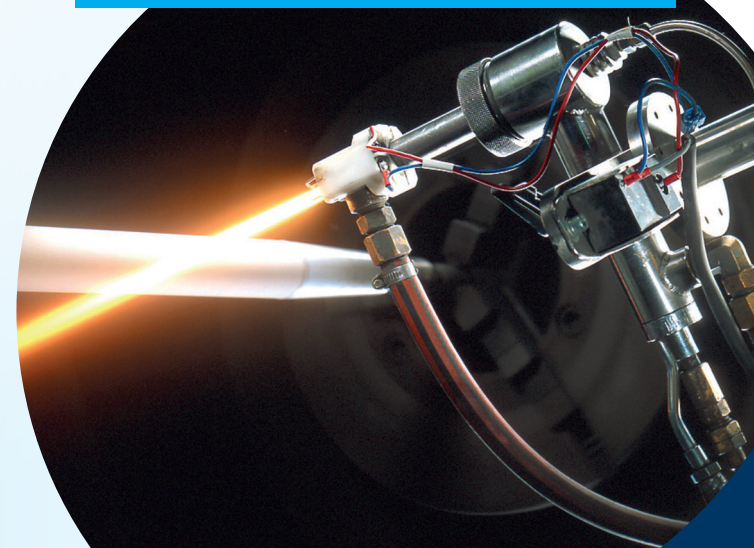

Dele-16104-B_02/2021

COATING TECHNOLOGIES

Thermal Spray


HVOF: High Velocity Oxy Fuel

The powder particles are heated and transferred with high kinetic energy to the surface of the workpiece providing a dense coating with excellent bonding properties.



APS: Air Plasma Spray

At high temperature a plasma gas stream softens or melts the coating particles which are transferred to the workpiece. Suitable for spraying of high-melting point metals as well as their oxides. APS is also suitable for Cermets and Copper-Aluminum coatings.



Spray & Fuse


The coating powder is softened or melted in an oxyacetylene flame and transferred to the workpiece. In a second stage, the sprayed coating is fused to the workpiece. Mainly used for coating of thermocouples.

Main Coating Alloys and Typical Properties					
	Process	Composition Weight %	Hardness HV	Thickness mm	Main features
Carbides	HVOF	88WC + 12Co	1250	0.25	Excellent wear and erosion resistance
	HVOF	86WC+10Co+4Cr	1200	0.25	Excellent wear resistance
	HVOF	75Cr ₃ C ₂ +25NiCr	800	0.25	Excellent wear resistance at high temperature or in corrosive media
Ceramic Oxides	APS	87Al ₂ O ₃ + 13TiO ₂	800	0.30	Good wear resistance up to 550 °C
	APS	99Cr ₂ O ₃	1300	0.30	Excellent resistance to wear in acid/basic solutions
	APS	95ZrO ₂ + CaO	450	3	Excellent thermal insulation
Special Alloys	PTA	Stellite™	28-60 HRC	> 1.5	Cobalt based alloys with very good resistance to corrosion, erosion and abrasion at high temperature.
	PTA	Deloro™	20-58 HRC	>1.5	Nickel based alloys with excellent corrosion, abrasion and wear
	PTA	Tribaloy™	47-60 HRC	>1.5	Excellent gas oxidation and corrosion resistance. High abrasive wear resistance

WELDED COATINGS

PTA: Plasma Transferred Arc

Automatic welding process with high powder utilization and very low dilution. Suitable for all cobalt alloys like Stellite™ and Tribaloy™ and nickel powders like Deloro™.

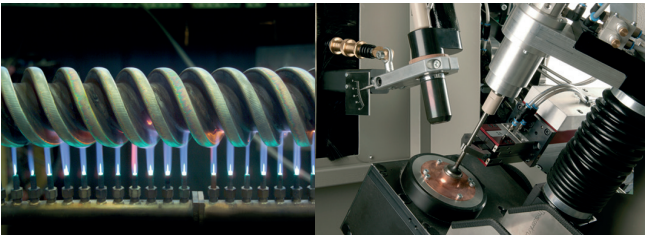

TIG – Tungsten Inert Gas


An arc is drawn between a non-consumable tungsten electrode and the workpiece and the pool of the hardfacing material is shielded by an inert gas. TIG is a simple, manual, flexible process.

MIG: Metal Inert Gas

Welding Wire is fed through the torch into the arc, where it is melted and transferred to the workpiece with a stream of shielding gas.

MMA: Manual Metal Arc

In this process an arc is drawn between a coated consumable electrode and the workpiece. The electrode coating melts to form a gas shield around the arc and the welding pool.

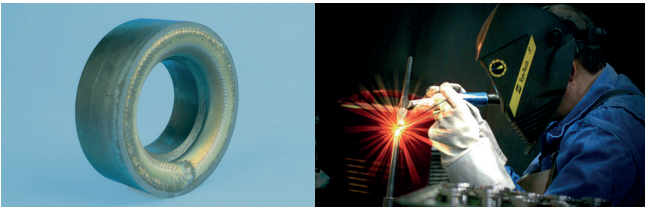

Dimension and Weight

Hardfacing Processes	Min and Max Workpiece Dimensions [mm]			
	ID (min.)	OD (max.)	Length (max.)	Weight [kg] (max.)
Automatic Gas Tungsten Arc Welding	40	450	300	200
Manual Gas Tungsten Arc	40	200	150	100
Air Plasma Spray (APS)		800	1800	1.000
Plasma Transferred Arc (PTA)	140	1600	5000	2.500
High Velocity Oxy-Fuel (HVOF)		800	2700	1.000

Massive Products: Stellite™ and Stellite™6B

Machining capabilities to produce massive Stellite™ parts like bushings, rings, spacers, washers, etc. starting from cast bars. Stellite™6B (AMS 5894) is a forged and/or rolled material. Bars and sheets present extraordinary resistance to wear due to the homogeneous structure and are normally used in demanding environment in Aerospace, PowerGen and Petrochem applications.



Stellite™6K Industrial Knives

Industrial Knives and scrapers supplied finished to drawing in Stellite™6K to increase the lifetime up to 10X in corrosive and abrasive enviroment. Typical thickness 0.8 – 9.5 mm.

